


W2P

SOLFLEX 650





The desktop
production units!





 **Dimensions:** 15.74 × 15.74 × 21.46 in
Maschinengröße: 400 × 400 × 545 mm


 **Print Volume:** 5.04 × 4.72 × 5.12 in*
Bauvolumen: 128 × 120 × 130 mm*


 **Layer Thickness:** 0.001–0.008 in
Schichtdicke: 25–200 µm


 **Pixel Size:** 0.0020 in*
Pixelgröße: 50 µm*

 **Technology:** UV-LED DLP®,
Wavelength: 385 nm
Technologie: UV-LED DLP®,
Wellenlänge: 385 nm

 **Weight:** approx. 44 lbs
Gewicht: ≈ 20 kg

 **Operating Temperature:** 64–82° F
Umfeldtemperatur: 18–28° C

 **Power Requirements:** 100–240V,
50/60Hz, 80 W
Netzanforderung: 100–240V,
50/60Hz, 80 W

 **Building Speed:** 4.72 in/hr**
Baugeschwindigkeit: 120 mm/Std.**





Vat Deflection Feedback System
saves up to 40% of manufacturing time

* Pixel Size and Print Volume may vary/Pixelgröße und Bauvolumen können geringfügig abweichen


** Layer Thickness: 200 µm, BuildStyle: Normal/Schichtdicke: 200 µm, BuildStyle: Normal

W2P

SOLFLEX 650

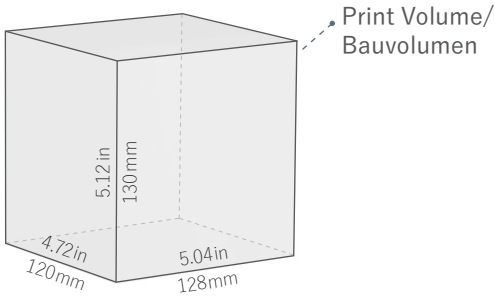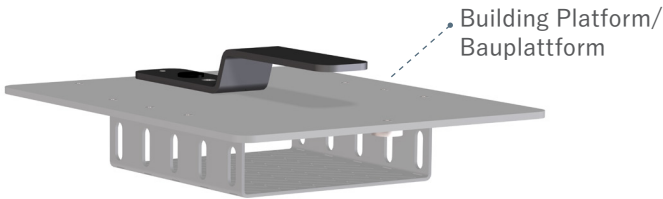

Moving DLP®

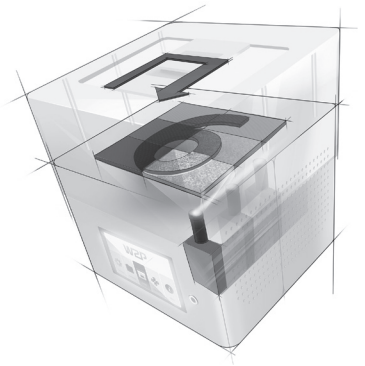

W2P Engineering GmbH

Am Campus 1
3400 Klosterneuburg | Austria
www.way2production.at

Contact

Phone: +43 (0) 1 306 28 57

E-Mail: office@way2production.at